

FIG. 1

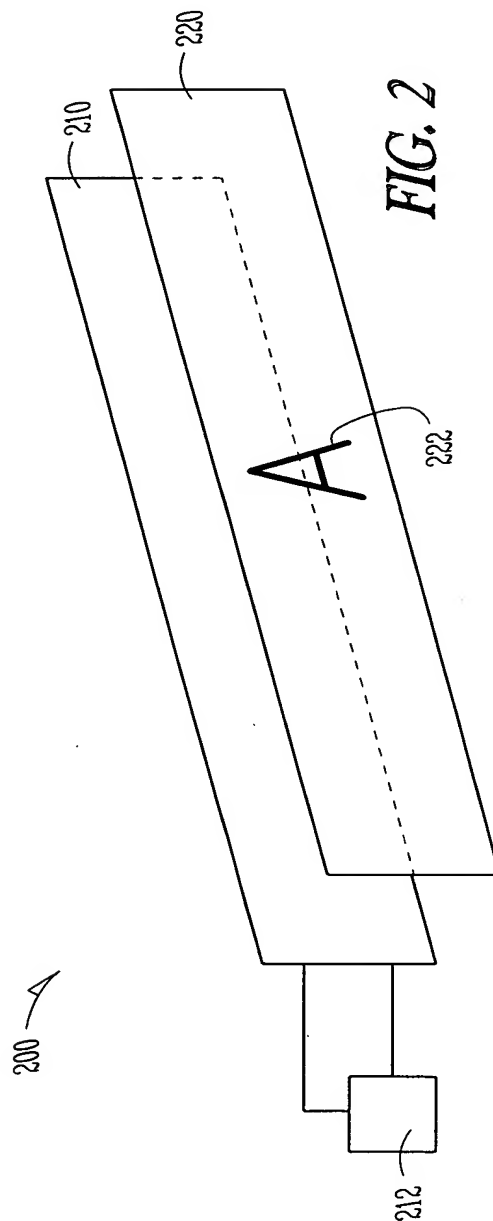


FIG. 2

2/12

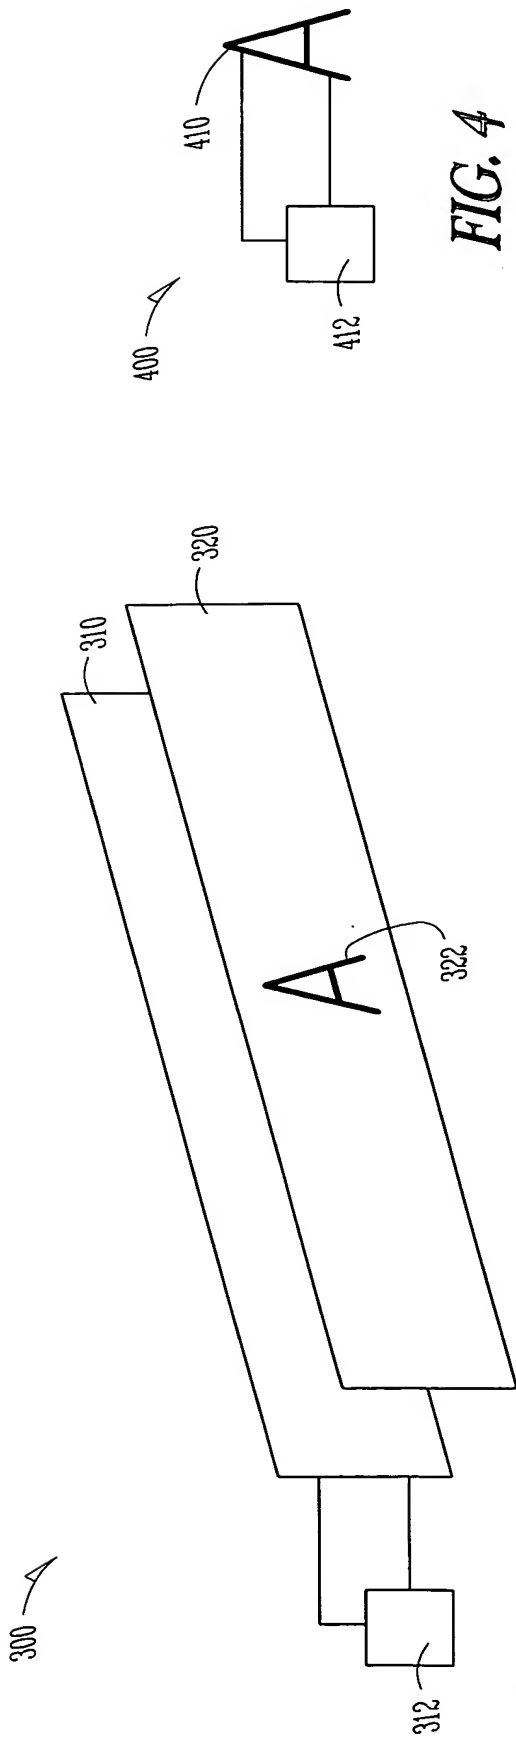


FIG. 4

FIG. 3





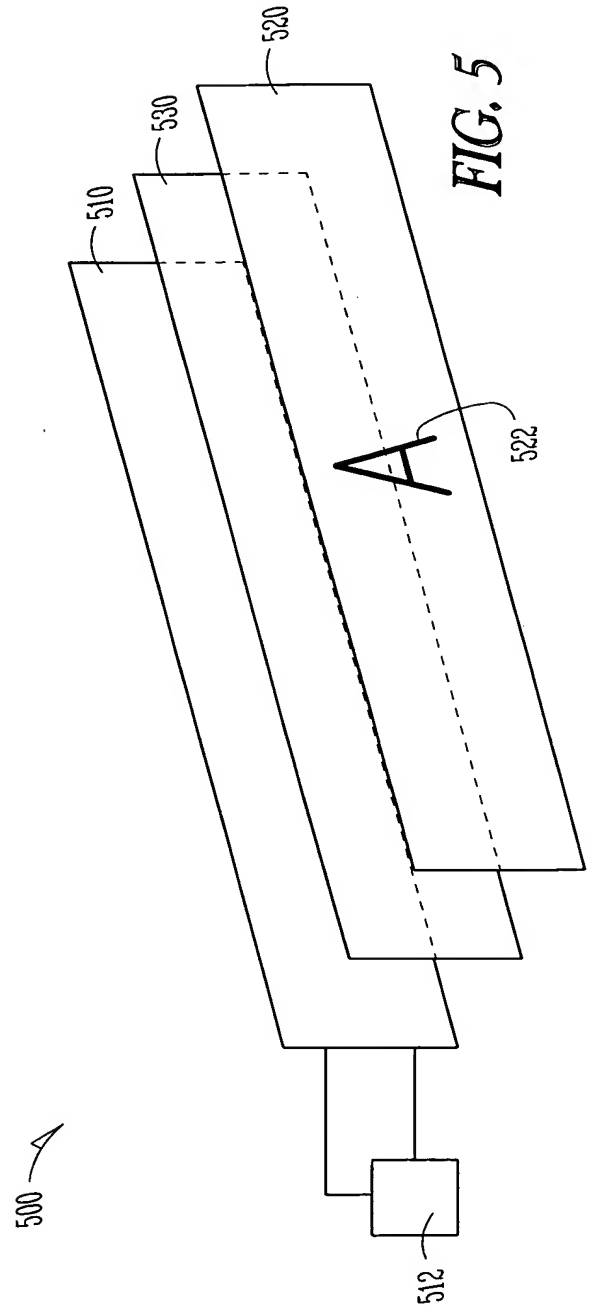


FIG. 5

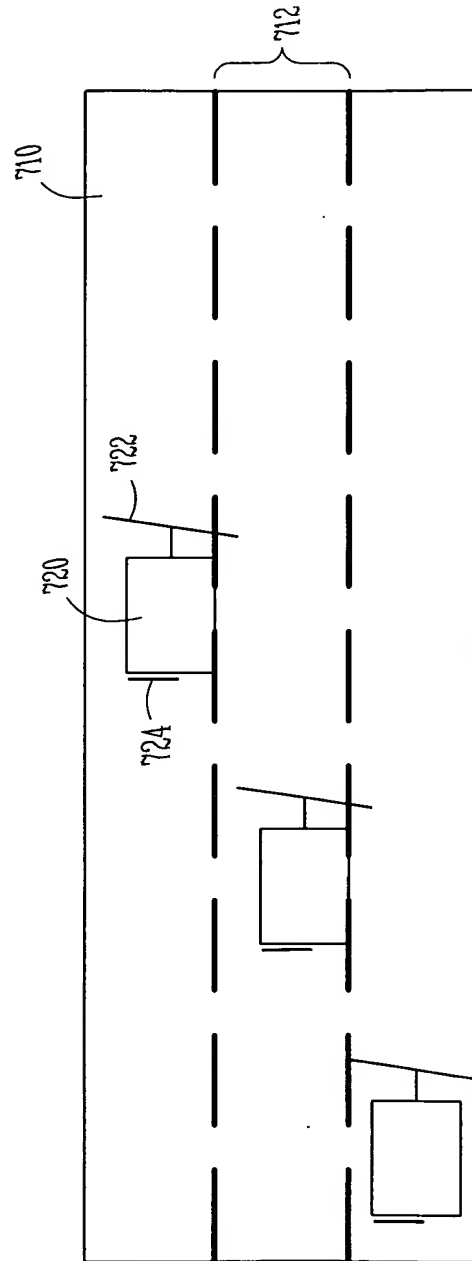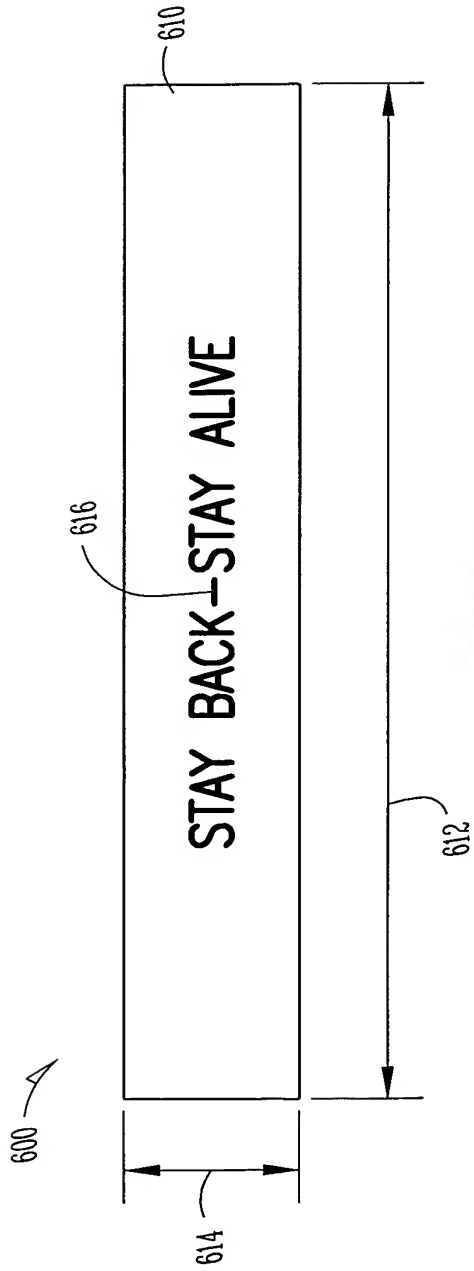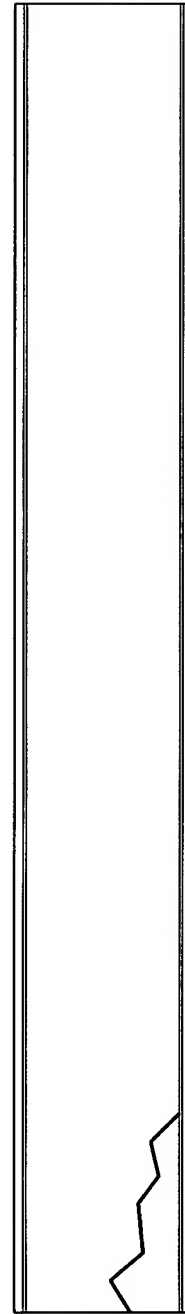

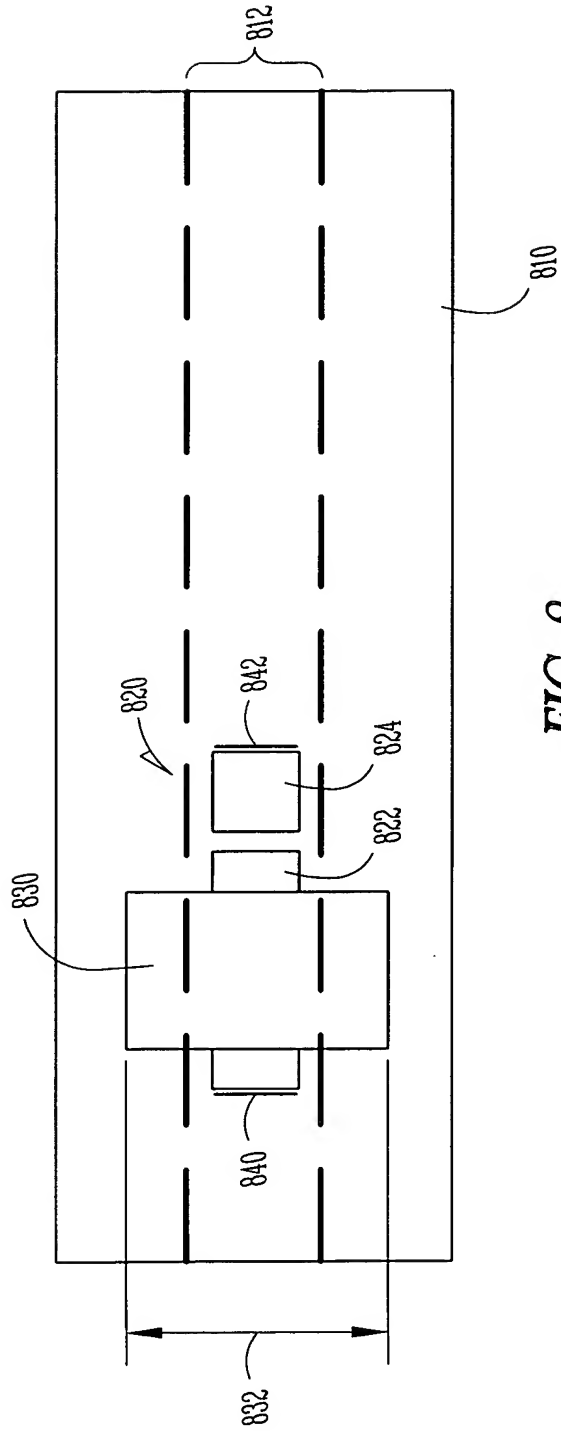

5/12

Stay Back Stay Alive Sign

Lamp Baseline Assumptions:

• Lamp Size:	8.5" x 72"
• Construction:	Hybrid
• Lit Color:	Yellow has a yellow on/off color
• Interconnection:	Crimp with Wires
• ITO Substrate Thickness:	0.007" (0.178mm)
• Nominal Lamp Thickness:	0.015" (0.38mm)
• Part Label:	On packaging
• Adhesive:	None
• Insulator:	0.0015" tape (a thicker laminate may be required for durability)
• Overprint:	TBD

Power Supply Specs

Driver	2-Amp or 5-Amp driver (120V _{rm} /60Hz input » 140V _{rms} /600Hz output)
--------	--

FIG. 10

6/12

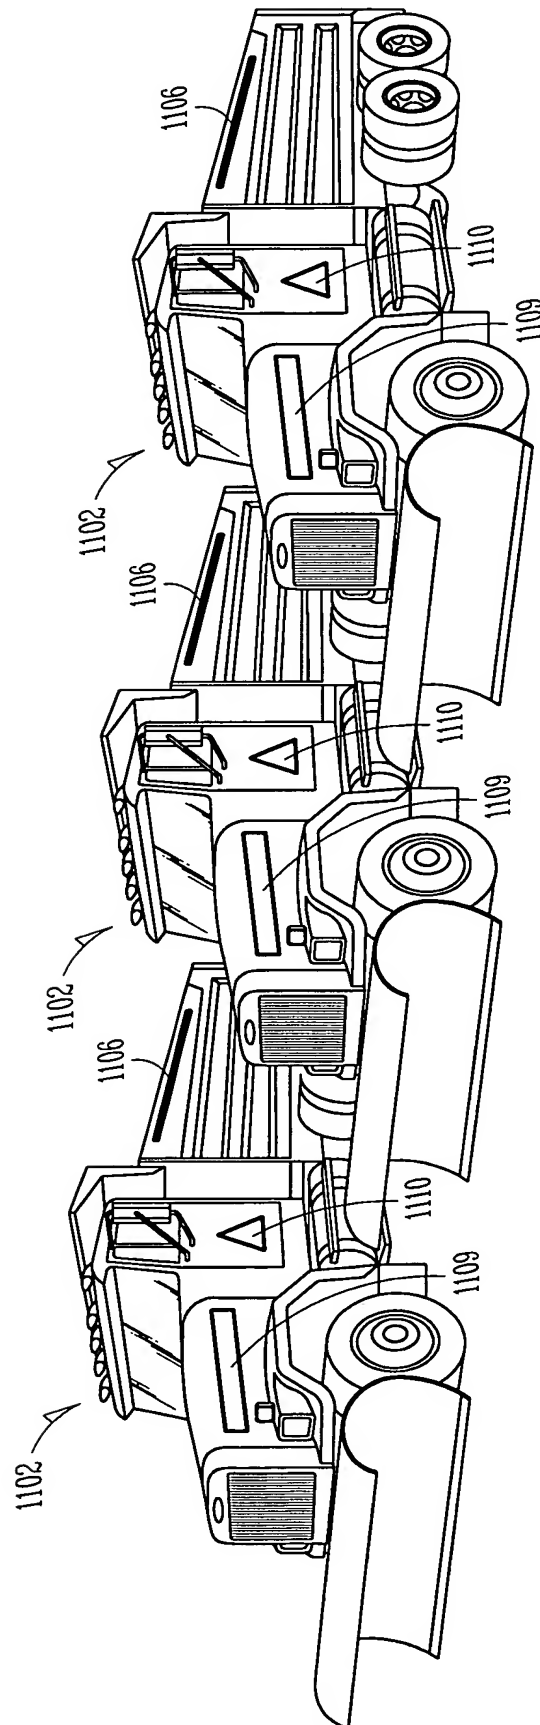


FIG. 11

7/12

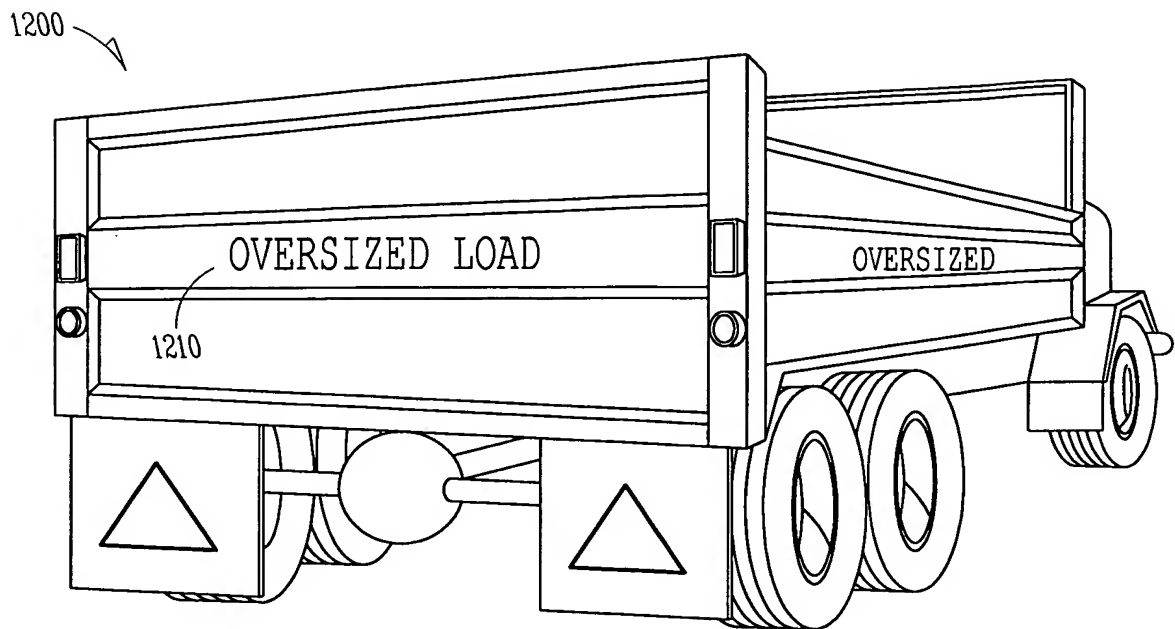


FIG. 12

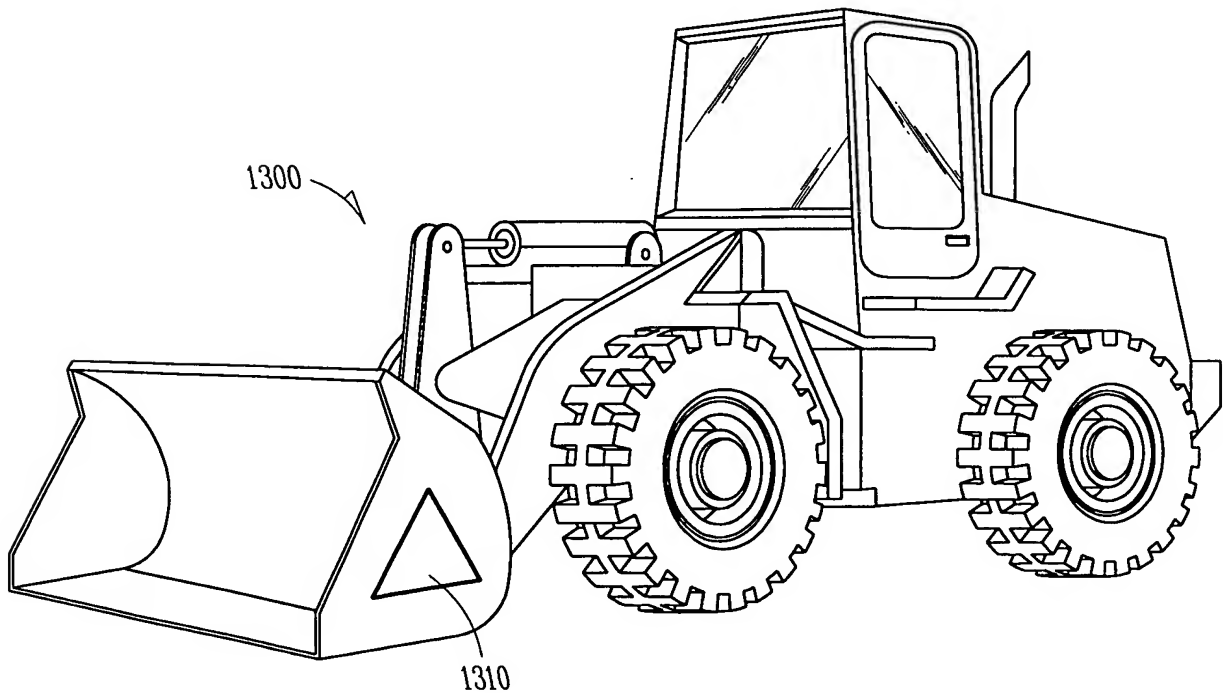


FIG. 13

8/12

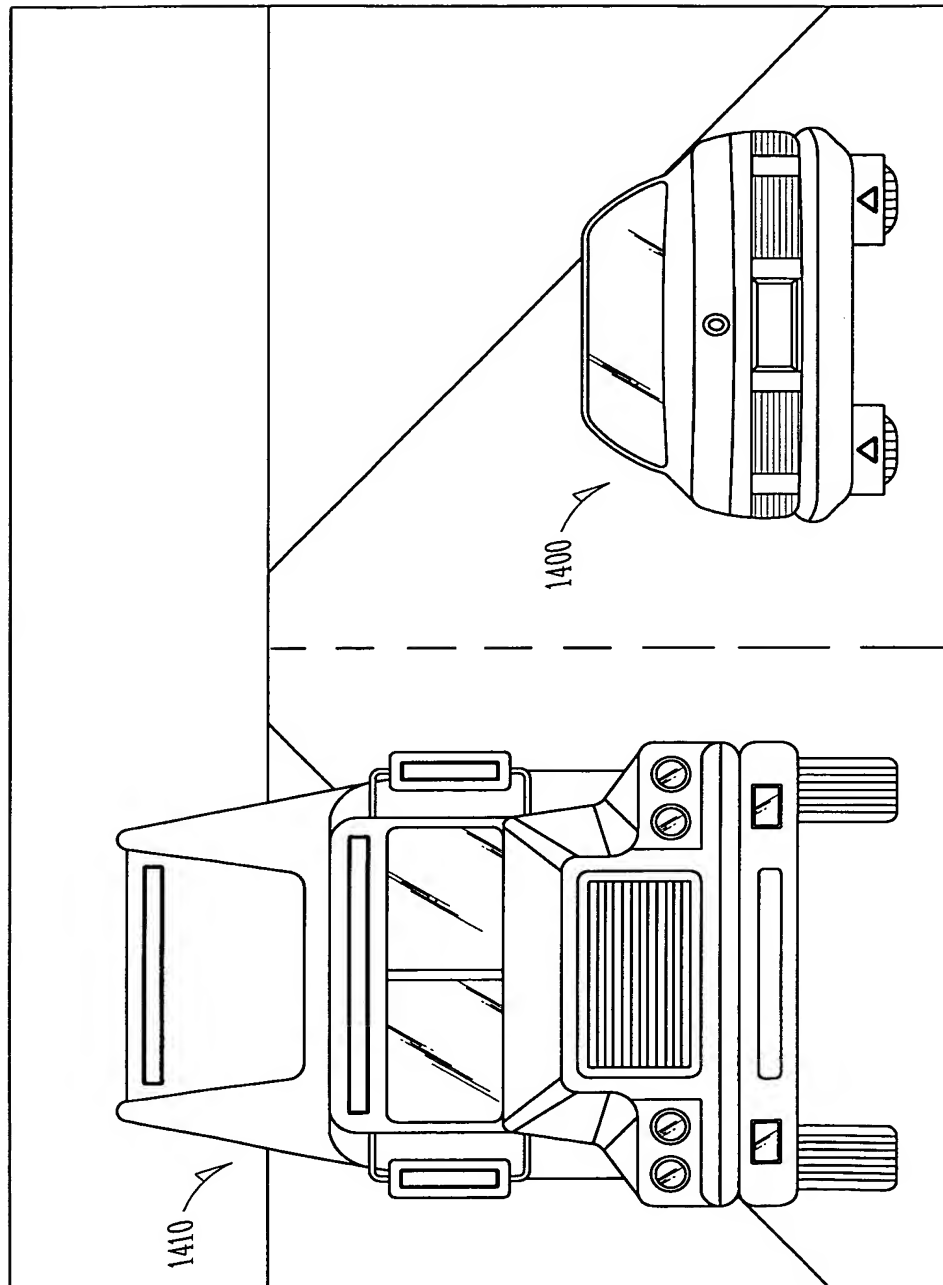


FIG. 14

9/12

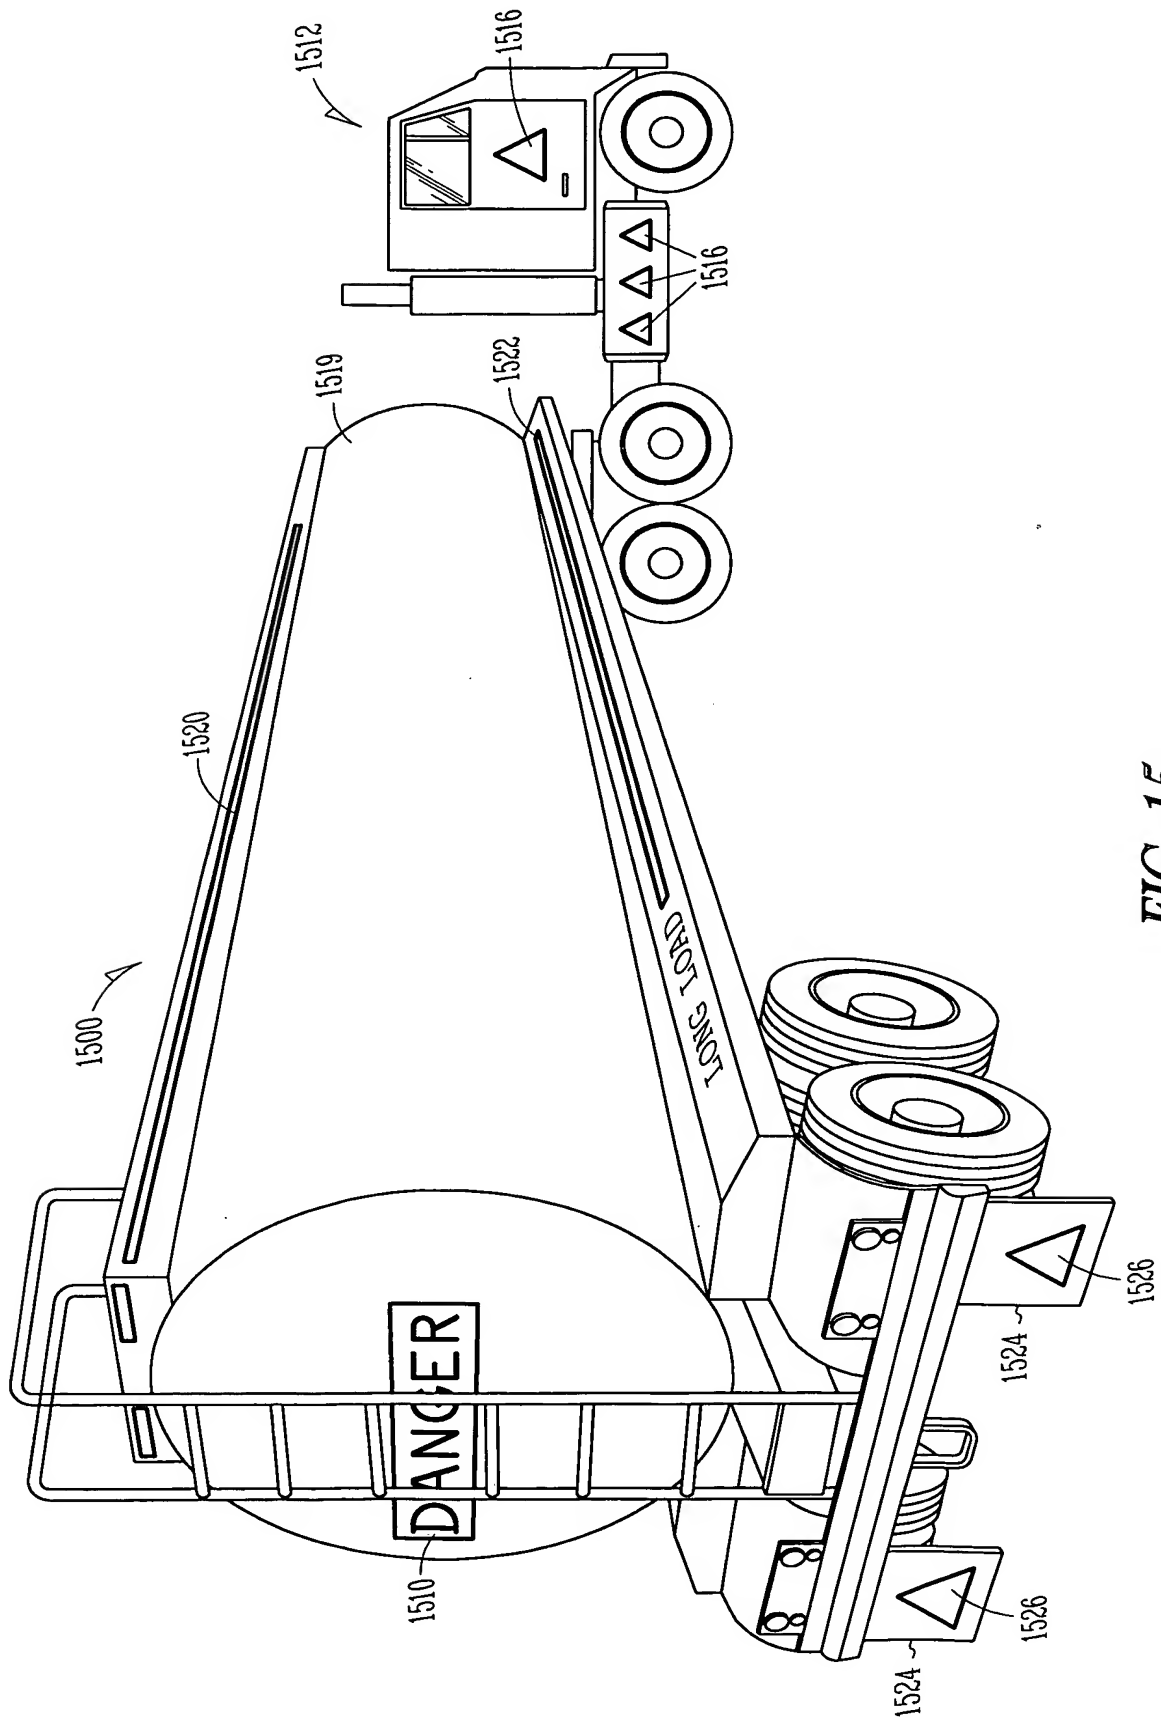


FIG. 15

10/12

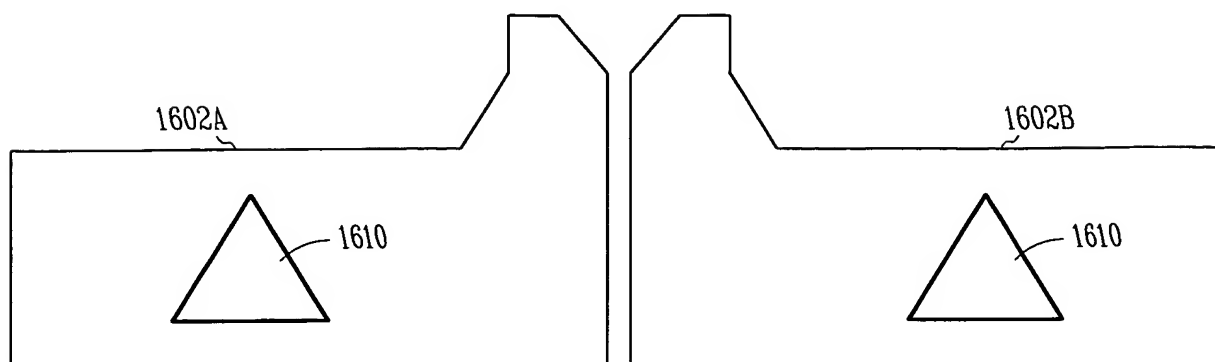


FIG. 16A

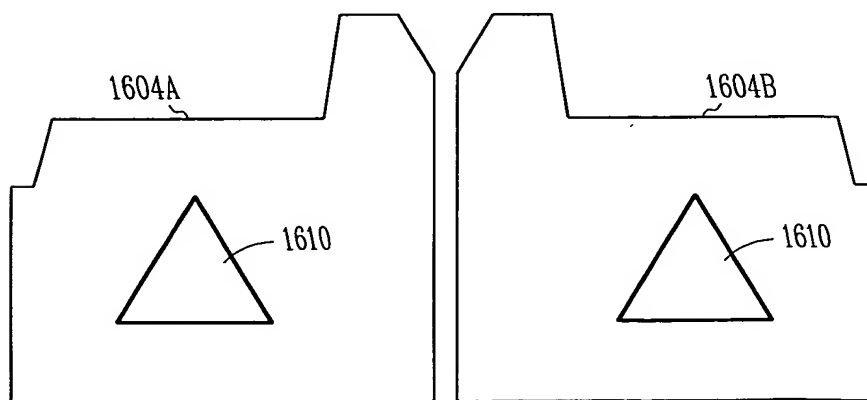


FIG. 16B

11/12

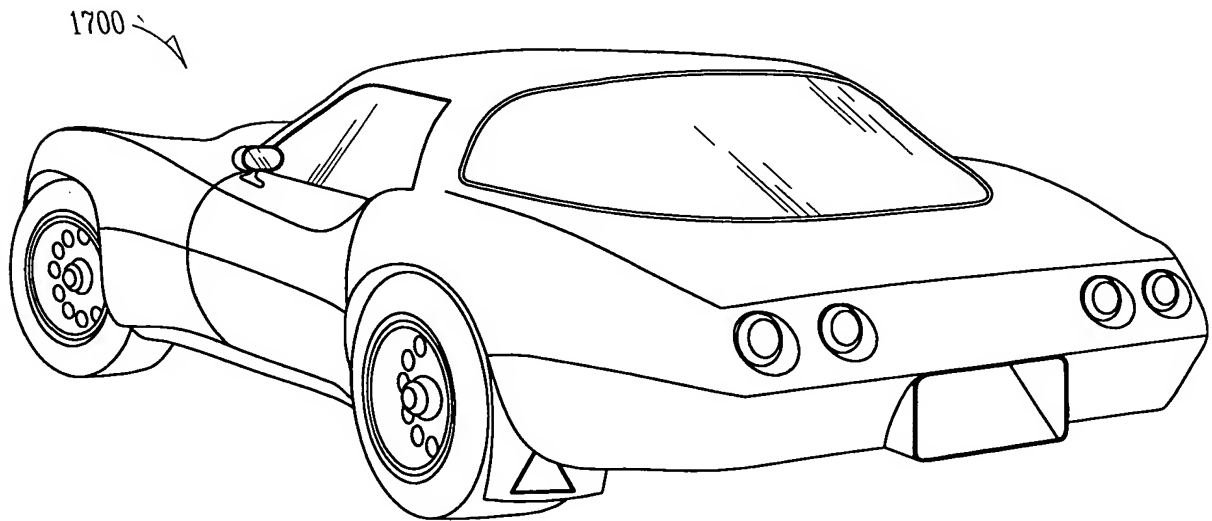


FIG. 17

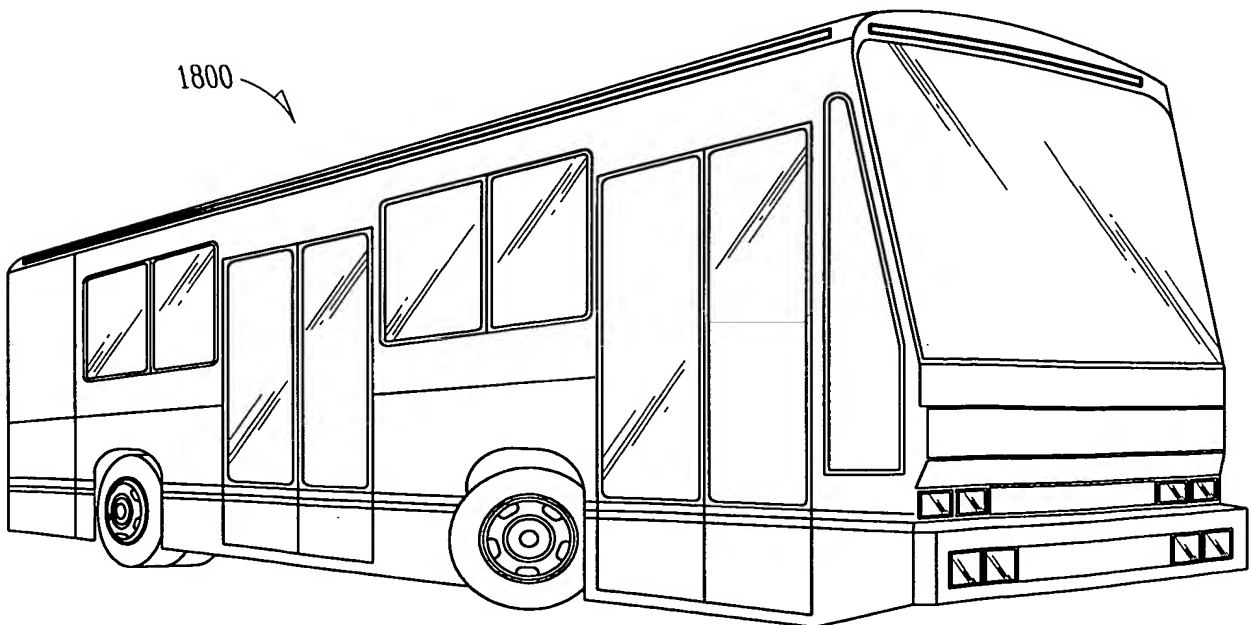


FIG. 18

12/12

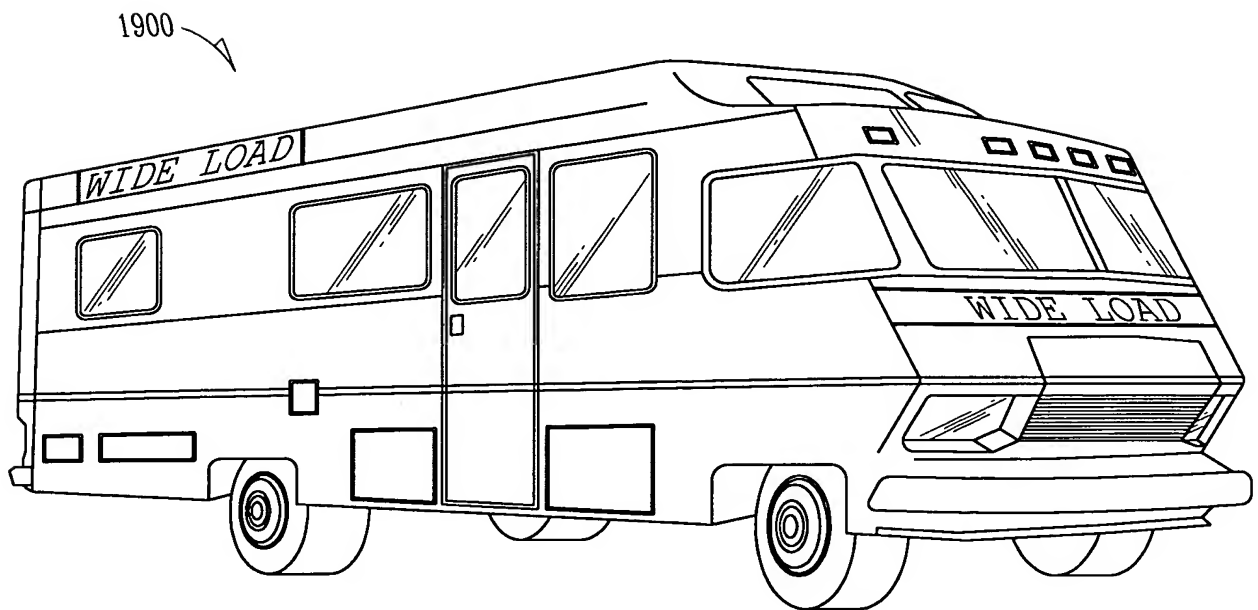


FIG. 19